

# GD70 - GD70C

T U M B L E   D R Y E R S

## TUMBLE DRYER

### Features

Drum made of stainless steel.

Inner asymmetric paddles to improve the laundry floating.

Single cleanable fan, easy to clean by yourself ! Service calls & money saved.

Door opening from right or left side (optional).

Lint filter detection and filter presence - Not possible to run without filter.

Model with external exhaust drainage or built-in condensing system.

Up to 50 drying programs and messages available in 25 languages

Remaining time on display.

Indication of full condenser tank (draining needed).

Memory functions - errors and used programmes.

A high temperature to minimize the drying time.

Low temperature for drying sensitive fabrics such as nylons, acrylics, rayons and acetates.



## Models GD

		GD70	GD70C
Ratio capacity	1:20	6	6
Drum dimension	Diameter (mm)	571	571
	Depth (mm)	476	476
	Volume (dm <sup>3</sup> )	117	117
Exhaust	Diameter (mm)	100	- - -
	Capacity (m <sup>3</sup> /h)	245	123
Door dimension	mm	450	450

### Net and package dimension

Net dimension	Width (mm)	595	595
	Depth (mm)	654	654
	Height (mm)	850 + 865	850 + 865
Package dimension	Width (mm)	723	723
	Depth (mm)	640	640
	Height (mm)	920	920
	Volume (m <sup>3</sup> )	0.43	0.43
Net and gross weight	kg	40.0 ÷ 44.4	45.0 ÷ 49.4

### Electric data

Electric supply	V / ph / Hz	230-240V 1~60Hz	
		<b>380-415V~3N 50Hz</b>	<b>380-415V~3N 50Hz</b>
		440V~3N 60Hz	440V~3N 60Hz
Thermal power	kW	3	2.5
Motor power	kW	0.2	0.2
Total power	kW	3.2	2.7
Fuse	A	10 ÷ 16	10 ÷ 16
Noise	dB	<52	<52

The minimum ideal requirements for proper operation of the equipment are as follows:


- Load of laundry with a maximum moisture content of 50% (super spun laundry)
- 23 °C Inlet air temperature
- 55% Moisture content in the inlet air
- Setting the drying cycle: Normal drying temperature

## Industrial performances in household dimensions

It's true! We have encapsulated a technology capable of meeting all the needs in the space of a household appliance.

This is the ideal solution for those requiring professional quality, but who do not have large amounts of laundry to treat: hair salons, spas, sports centres, camping sites, pizzerias and small family-run restaurants, along with small resorts.

For more demanding customers there is the version fitted with a discharge valve, which is even quicker and more reliable.

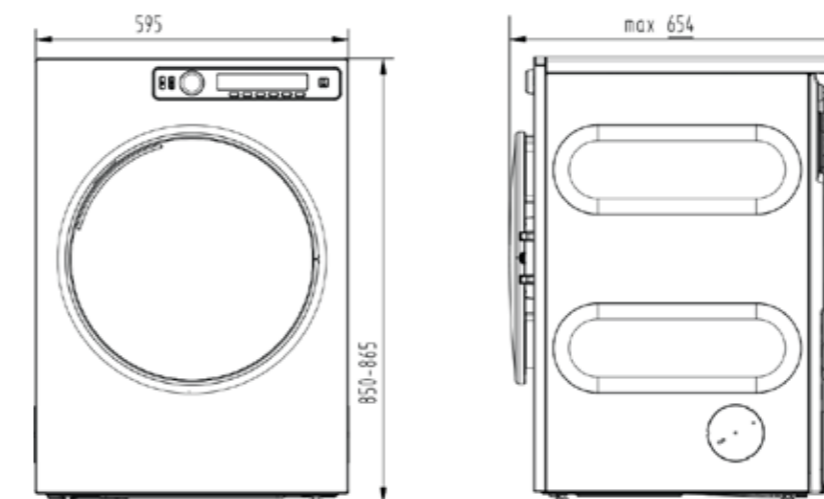

GD6 - GD6C 201808 rel.01 REF. GR00000000H012

The manufacturer declines all responsibility for any inexactitudes contained in this catalogue. The manufacturer reserves the right to bring, without warning, any modifications he might believe necessary, without changing the essential characteristics of the product.

**grandimpianti i.l.e - Ali Group S.r.l. a Socio Unico**

via Giuseppe ed Augusta Trevisson n°5 - 32037 sospiolo  
(BL) Italy ph. +39 0437 848 711 - fax +39 0437 879 108  
www.grandimpianti.com - info@grandimpianti.com



COMPANY WITH  
MANAGEMENT SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =  
= ISO 14001 =  
= ISO 45001 =

an Ali Group Company



The Spirit of Excellence